

◆Specifications


Model	SC-T
Compaction speed	Approx. 40 kg ~ 60 kg/h
Power supply	Three-phase 200V 50/60Hz
Power consumption	11.0kW/h
Size of main body	W1000(1708)×D930×H1750mm W1000(1158)×D1180×H1750mm
Weight	930kg
Insertion slot size	W620×H500mm

The specifications might change without prior notice.

◆Can compact all types of styrofoam: EPS (shock absorbing material), PSP (food trays), XPS (insulation materials used in construction), etc.

A video of the compaction process can be viewed on our homepage.

<http://www.nikks-japan.com/>

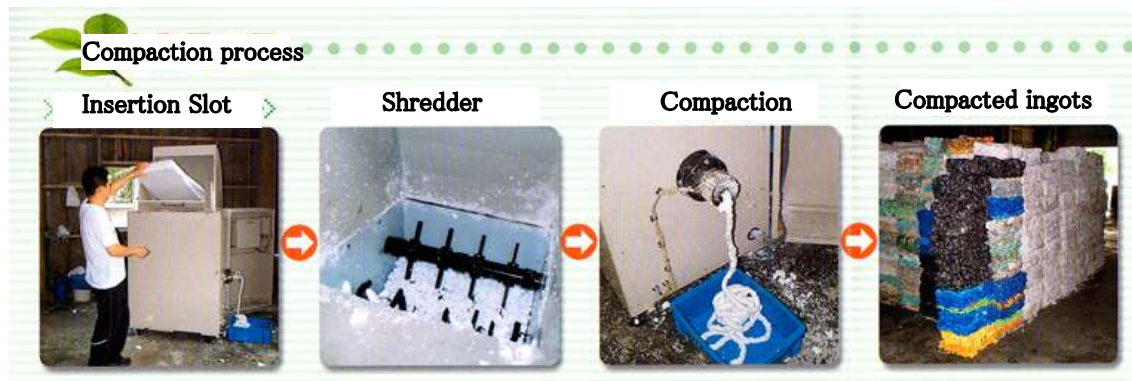

◆Customers who would benefit from our machine

Municipalities, industrial waste disposal traders, fishing ports, fish markets, dismantlement and processing traders, amusement park attraction facilities, department stores, supermarkets, electronics stores, discount houses, office automation equipment manufacturers, food processors, importers, foam production processors, warehouses, couriers, construction companies

Manufacturing and Sales Headquarters

Nikks Japan Ltd.

〒331-0045 Uchino Hongo Saitama City Nishi Ward

268-2-201